



# You Design. We Deliver.

Newest products for **your** newest designs.

Authorized Distributor

**Learn more**

显灿电子 [www.szyucan.com](http://www.szyucan.com)



## Application Note: AN\_SY8120B

### High Efficiency Fast Response, 2A, 18V Input Synchronous Step Down Regulator

#### Preliminary Specification

#### General Description

SY8120B develops high efficiency synchronous step-down DC-DC converter capable of delivering 2A load current. SY8120B operates over a wide input voltage range from 4.5V to 18V and integrates main switch and synchronous switch with very low  $R_{DS(ON)}$  to minimize the conduction loss.

SY8120B adopts the instant PWM architecture to achieve fast transient responses for high step down applications and high efficiency at light loads. In addition, it operates under heavy load conditions to minimize the size of inductor and capacitor.

#### Ordering Information

SY8120 ( ) ( ) ( ) ( )

Temperature Code  
Package Code  
Optional Spec Code

Temperature Range: -40°C to 85°C

Ordering Number	Package type	Note
SY8120BABC	SOT23-6	--

#### Features

- Low  $R_{DS(ON)}$  for internal switches (top/bottom): 145/135m $\Omega$
- 4.5-18V input voltage range
- 2A load current capability
- Instant PWM architecture to achieve fast transient responses Internal softstart limits the inrush current
- 2% 0.6V reference
- RoHS Compliant and Halogen Free
- Compact package: SOT23-6

#### Applications

- Set Top Box
- Portable TV
- Access Point Router
- DSL Modem
- LCD TV

#### Typical Applications

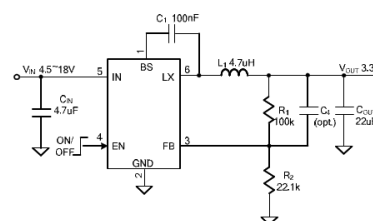


Figure 1. Schematic Diagram





Figure 2. Efficiency Figure


显灿电子 [www.szyucan.com](http://www.szyucan.com)



## AN SY8120B

#### Pinout (top view)








( $V_{IN} = 12V$ ,  $V_{OUT} = 1.2V$ ,  $L = 2.2\mu H$ ,  $C_{OUT} = 10\mu F$ ,  $T_A = 25^\circ C$ ,  $I_{OUT} = 1A$  unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Voltage Range	$V_{IN}$		4.5		18	V
Quiescent Current	$I_Q$	$I_{OUT}=0$ , $V_{FB}=V_{REF} \times 105\%$		400		$\mu A$
Shutdown Current	$I_{SHDN}$	$EN=0$		5	10	$\mu A$
Feedback Reference Voltage	$V_{REF}$		0.588	0.6	0.612	V
FB Input Current	$I_{FB}$	$V_{FB}=V_{IN}$	-50 50			nA
Top FET RON	$R_{DS(ON)1}$			0.145		$\Omega$
Bottom FET RON	$R_{DS(ON)2}$			0.135		$\Omega$
Bottom FET Valley Current Limit	$I_{BLM}$		2A			
EN Rising Threshold	$V_{ENH}$		1.5 V			
EN Falling Threshold	$V_{ENL}$				0.4 V	
Input UVLO Threshold	$V_{UVLO}$				4.5 V	
On Time	$T_{ON}$	$V_{IN}=12V$ , $V_{OUT}=1.2V$ , $I_{OUT}=1A$		200 ns		
Min. ON Time				50 ns		
Min. Off Time				100 ns		
Thermal Shutdown Temperature	$T_{SD}$			150 °C		
Thermal Shutdown Hysteresis	$T_{HYS}$			15 °C		

Note 2:  $\theta_{JA}$  is measured in the natural convection at TA = 25°C on a low effective single layer thermal conductivity test board of JEDEC 51-3 thermal measurement standard. Pin 2 of SOT-23-6 packages is the case


昱灿电子 [www.szyucan.com](http://www.szyucan.com)




## AN\_SY8120B

### Typical Performance Characteristics


Efficiency vs. Load Current



Efficiency vs. Load Current




Efficiency vs. Load Current



Output Ripple


(VIN=12V, VOUT=3.3V, ILOAD=2A)



Time (1us/div)

Load Transient


(VIN=12V, VOUT=3.3V, ILOAD=0.2-1A)



Time (40us/div)

Load Transient





(VIN=12V, VOUT=3.3V, ILOAD=1-2A)



Time (40us/div)



## AN SY8120B



## AN SY8120B

## Operation

SY8120B is a synchronous buck regulator IC that integrates the PWM control, top and bottom switches on the same die to minimize the switching transition loss and conduction loss. With ultra low  $R_{ds(on)}$  power switches and proprietary PWM control, this regulator IC can achieve the highest efficiency and the highest switch frequency simultaneously to minimize the external inductor and capacitor size, and thus achieving the minimum solution footprint.


SY8120B provides protection functions such as cycle by cycle current limiting and thermal shutdown

minimize the loop area formed by  $C_{IN}$  and  $IN/GND$  pins. In this case, a 4.7uF low ESR ceramic capacitor is recommended.

Output capacitor  $C_{OUT}$ :

The output capacitor is selected to handle the output ripple noise requirements. Both steady state ripple and transient requirements must be taken into consideration when selecting this capacitor. For the best performance, it is recommended to use X5R or better grade ceramic capacitor greater than 22uF capacitance.

Output inductor L:

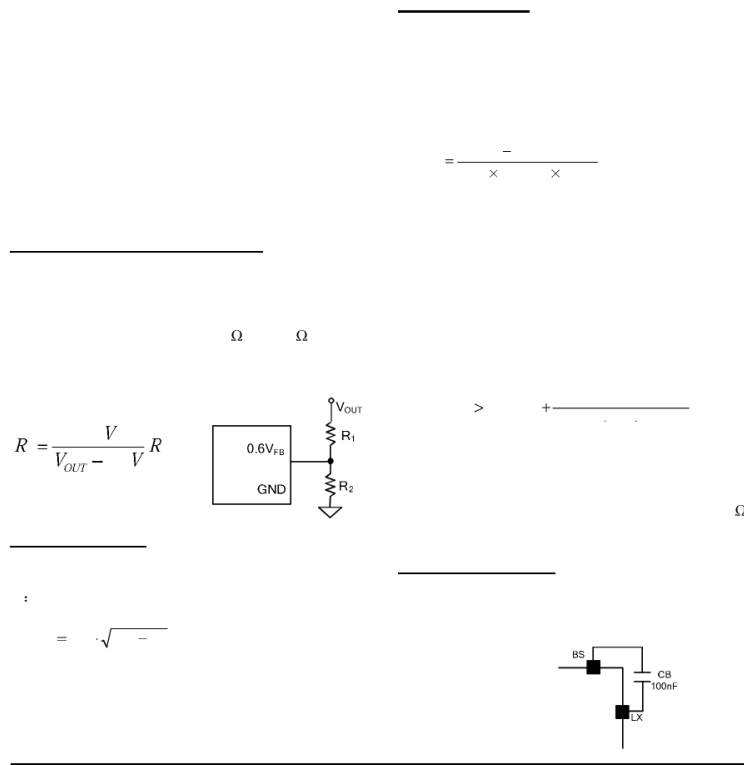


昱灿电子 [www.szyucan.com](http://www.szyucan.com)



## AN SY8120B

### Load Transient Considerations:

The SY8120B regulator IC integrates the compensation network to achieve good stability and fast transient responses. In some applications, adding a 22pF ceramic capacitor in parallel with R1 may further speed up the load transient responses and is thus recommended for applications with large load transient step requirements.



### Layout Design:


The layout design of SY8120B regulator is relatively simple. For the best efficiency and minimum noise problem, we should place the following components close to the IC: CIN, L, R1 and R2.

- 1) It is desirable to maximize the PCB copper area connecting to GND pin to achieve the best thermal and noise performance. If the board space allowed, a ground plane is highly desirable.
- 2) CIN must be close to Pins IN and GND. The loop area formed by CIN and GND must be minimized.
- 3) The PCB copper area associated with LX pin must be minimized to avoid the potential noise problem.
- 4) The components R1 and R2, and the trace connecting to the FB pin must NOT be adjacent to the LX net on the PCB layout to avoid the noise problem.
- 5) If the system chip interfacing with the EN pin has a high impedance state at shutdown mode and the IN pin is connected directly to a power source such as a Li-Ion battery, it is desirable to add a pull down 1Mohm resistor between the EN and GND pins to prevent the noise from falsely turning on the regulator at shutdown mode.


昱灿电子 [www.szyucan.com](http://www.szyucan.com)

AN\_SY8120B



## SOT23-6L Package Outline &amp; PCB layout



Recommended Pad Layout



Top View



Notes: All dimension in MM  
All dimension don't not include mold flash & metal burr

[\[1\]](#) [\[2\]](#)



[Download PDF File \(Total 9 Pages\)](#)

## Honeywell Integrated Pressure Transducer

Provides High Accuracy in a Small and Versatile Design



**Honeywell**

**LEARN MORE**